


DATA SHEET - CONICAL CONCRETE BUCKET WITH RUBBER HOSE AND VALVE AT THE END OF THE HOSE

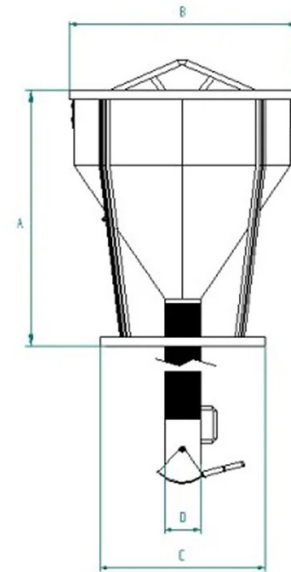

Code	Capacity (kg)	Capacity (L)	Weight (kg)	Dimensions (mm)			
				A	B	C	D
CT-40VALT	1040	400					
CT-50VALT	1300	500	110	1250	1050	880	150
CT-80VALT	2080	800	155	1490	1250	930	150
CT-99VALT	2600	1000	170	1770	1345	1080	150
CT-150VALT	3900	1500	230	2170	1255	950	150
CT-150NVALT	3900	1500					
CT-200NVALT	5200	2000					

DATA SHEET - CONICAL CONCRETE BUCKET WITH RUBBER HOSE AND VALVE AT THE END OF THE HOSE

Concrete buckets




Conical concrete bucket with rubber hose and valve at the end of the hose

Conical concrete bucket with central discharge, rubber hose, and valve at the end of the hose

We are pleased to introduce our CT-VALT model conical concrete bucket, designed to offer a more efficient and controlled pouring experience. The CT-VALT model features a central discharge with a robust and flexible 150 mm diameter rubber hose, equipped with a manual opening and closing valve at the end. This feature allows greater control over the flow of concrete during pouring, enabling quick and precise interruption and resumption of pouring. All our buckets are built and tested in accordance with stringent UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204 standards. Each product is accompanied by a metal ID plate, conformity certificate, and operation and maintenance manual to ensure proper use over time. Additionally, all our products are covered by a one-year warranty, in compliance with the European Directive.

Application sectors

 Construction