


DATA SHEET - GALVANIZED CONICAL CONCRETE BUCKET WITH BOTTOM DISCHARGE

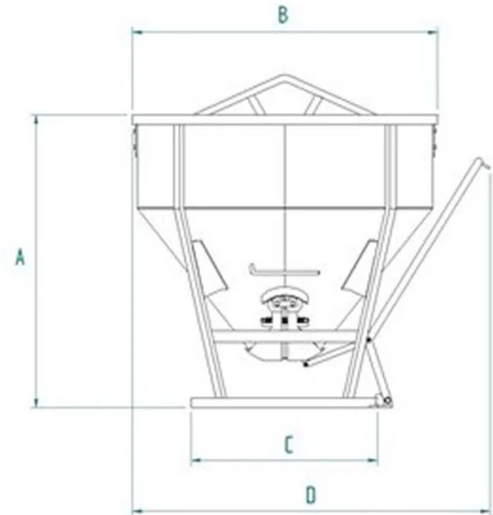

Code	Capacity (kg)	Capacity (L)	Weight (kg)	Dimensions (mm)			
				A	B	C	D
C-15ZN	390	150	55	540	920	750	1050
C-20ZN	520	200	60	620	920	750	1050
C-25ZN	650	250	65	700	920	750	1050
C-30ZN	780	300	70	780	920	750	1050
C-35ZN	910	350	75	860	920	750	1050
C-40ZN	1040	400	80	890	1050	880	1200
C-50ZN	1300	500	90	950	1050	880	1200
C-60ZN	1560	600	95	1070	1050	880	1200
C-80ZN	2080	800	145	1120	1250	750	1450
C-99ZN	2600	1000	160	1300	1250	750	1450
C-150ZN	3900	1500	240	1800	1250	750	1450

DATA SHEET - GALVANIZED CONICAL CONCRETE BUCKET WITH BOTTOM DISCHARGE

Concrete buckets




Galvanized conical concrete bucket with bottom discharge

Galvanized conical concrete bucket with central discharge and lever opening

The C-ZN model represents the hot-dip galvanized version of our Model C conical bucket. Equipped with a lever-operated bi-valve opening for precise concrete pouring, this model ensures quality work and safety in every phase of the process. Hot-dip galvanizing provides effective corrosion protection, ensuring strength and durability over time even in harsh environments. The increased strength from galvanizing contributes to the skip's longevity, simplifying maintenance and improving its overall aesthetic appearance. Available in various sizes and capacities as indicated in the table, the C-ZN model adapts to the specific needs of any construction site. Each bucket is built and tested according to stringent standards of UNI EN ISO 12100, UNI EN 13854, ISO 8686, UNI EN 10027, and UNI EN 10204, ensuring the highest quality and safety of our products. Each item comes with a metal ID plate, a certificate of conformity, and an operation and maintenance manual. Our Model C-ZN conical bucket is covered by a one-year warranty in compliance with the European Directive. Choose our solution for efficient and reliable work experiences in the concrete sector.

Application sectors

 Construction